



K5UL Air Winch

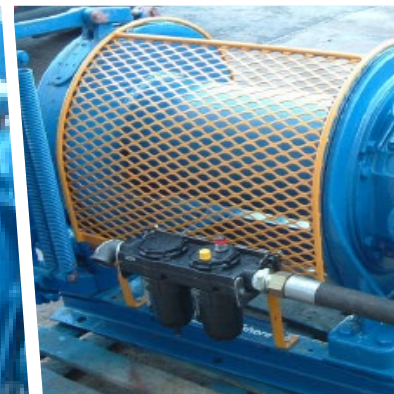

K5UL Air Winch	
Rated capacity	ANSI Mid-layer 2268kg with 220m x Ø12mm on drum
Performance	Line speed on 6th layer at rated load = 35.0m/min (115 fpm). Stall on 1st layer = 4.8 tonne
Air consumption at rated line pull	12.0m³/min (420 cfm) at 6.2 bar (90 psi) via Ø1½" hose
Braking	Brake holding on 1st layer - 49276kg Automatic failsafe air operated band on drum
Net Weight	430kgs
Extras	Tensioning manifold can be provided

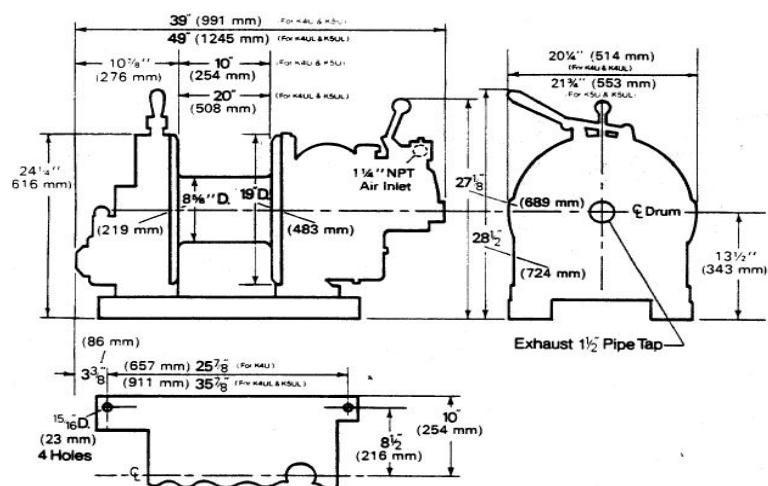

For more information on how Fisher Offshore can add value to your offshore operations visit www.fisheroffshore.com


or contact one of our specialist consultants at info@fisheroffshore.com or call +44 (0) 1651 87 39 32

Fisher Offshore, North Meadows, Oldmeldrum, Aberdeenshire, Scotland AB51 0GQ



K5UL Air Winch

K5UL	Core dia		flnge dp		Drum wd		
Rope Ø mm	10	12	13	14	16	18	19
Turns/Layer	48.8	40.7	37.6	34.9	30.5	27.1	25.7
Layer	metre	metre	metre	metre	metre	metre	metre
1	35	30	27	26	23	20	19
2	73	62	58	54	48	43	42
3	115	98	91	86	77	70	67
4	159	137	128	121	109	99	95
5	206	178	168	158	143	132	127
6	257	223	210	199	181	167	161
7	310	271	256	243	222	206	199
8	367	322	305	290	266		
9	427	376	357				
10	490	434	412				
11	555	494					
12	624						
13	696						

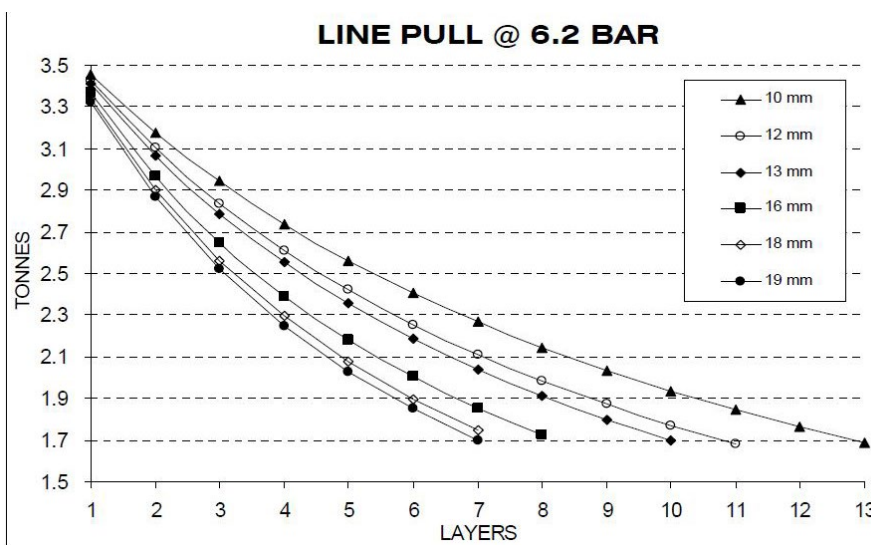

For more information on how Fisher Offshore can add value to your offshore operations visit www.fisheroffshore.com

or contact one of our specialist consultants at info@fisheroffshore.com or call +44 (0) 1651 87 39 32

Fisher Offshore, North Meadows, Oldmeldrum, Aberdeenshire, Scotland AB51 0GQ