




FA10-40XK1 (40") Air Winch



FA10-40XK1 (40") Air Winch	
Rated capacity	10000kg with 670m x Ø26mm on drum
Performance	Line speed on 3rd layer at light load = 14.5m/min (48 fpm) Line speed on top layer at rated load = 7.0 m/min (23 fpm) Stall on 1st layer = 17.27T
Air consumption at rated line pull	22.7m ³ /min (800 cfm) at 6.2 bar (90 psi) via Ø1½" hose
Braking	Automatic failsafe multi-disc brake, spring applied and air released
Net Weight	1900kgs
Extras	Self-returning throttle mounted on winch Secondary base can be provided

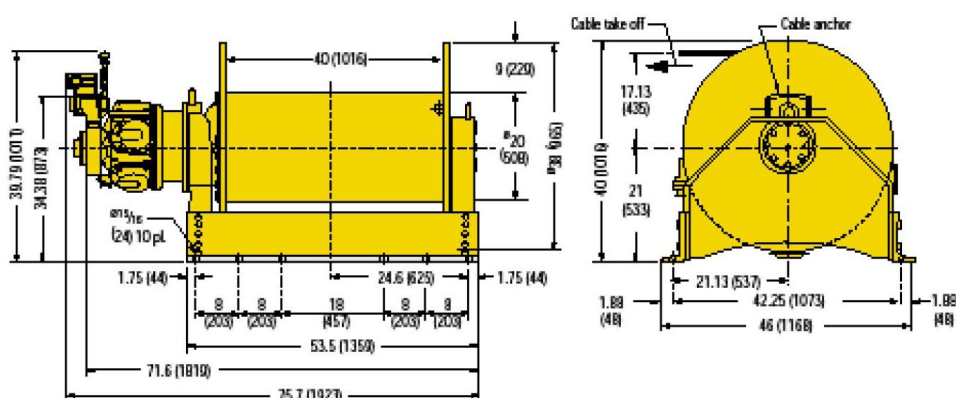

For more information on how Fisher Offshore can add value to your offshore operations visit www.fisheroffshore.com


or contact one of our specialist consultants at info@fisheroffshore.com or call +44 (0) 1651 87 39 32

Fisher Offshore, North Meadows, Oldmeldrum, Aberdeenshire, Scotland AB51 0GQ



FA10-24XK1 Air Winch

FA10-40XK1	Core dia	381	flnge dp	152	Drum wd	610
Rope Ø mm	18	20	22	24	26	28
Turns/Layer	54.3	48.8	44.4	40.7	37.6	34.9
Layer	metre	metre	metre	metre	metre	metre
1	90	81	74	68	63	59
2	186	168	154	142	132	124
3	288	262	240	223	208	195
4	396	361	333	309	289	272
5	510	467	431	402	377	355
6	630	578	536	500	470	445
7	757	696	647	605	570	540
8	889	820	763	716	676	642
9	1028	950	887	833		
10	1173	1087	1016			
11	1324	1229				
12	1482					

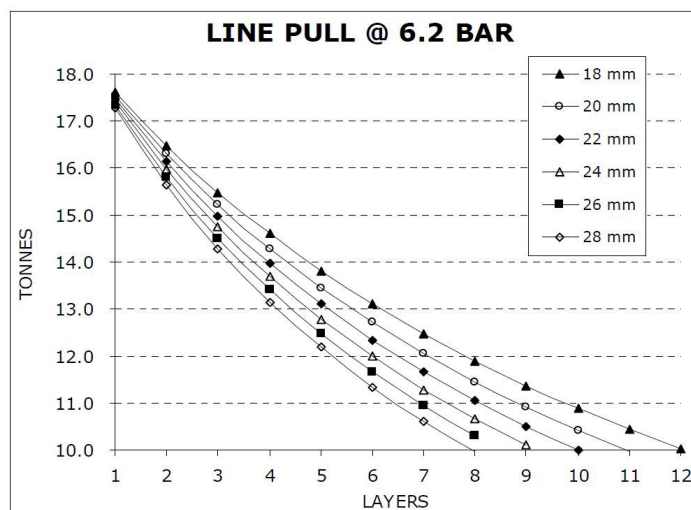

For more information on how Fisher Offshore can add value to your offshore operations visit www.fisheroffshore.com

or contact one of our specialist consultants at info@fisheroffshore.com or call +44 (0) 1651 87 39 32

Fisher Offshore, North Meadows, Oldmeldrum, Aberdeenshire, Scotland AB51 0GQ